




LEAD CARBON BATTERY

HC12-250

HUB CARBON

The HC series lead-carbon batteries use activated carbon and graphene in the manufacturing process. Our advantages include long cycle life and significantly reduced battery sulfation. The battery technology improves the ability of rapid charge and discharge and greatly prolongs battery life with more than 2000 cycles at 80 % DOD. The HC series are best suited for cycling and partial state of charge (PSOC) applications.

TECHNICAL DRAWING

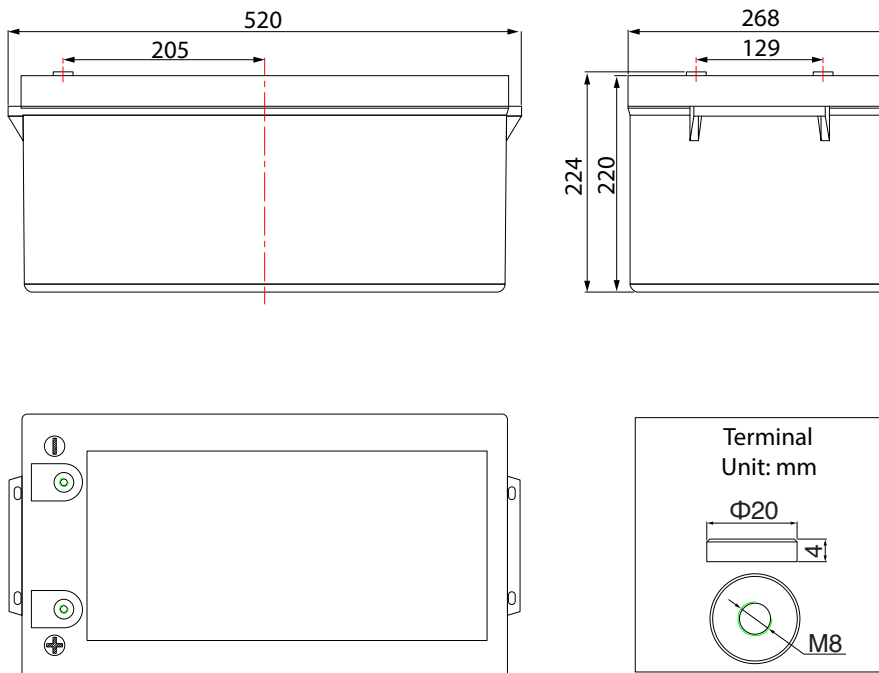

BENEFITS AND ADVANTAGES

Start at the Core

- Able to operate at -40C to +60C
- DOD @ 50%, 3000 cycles
- Integrated design to ensure the best uniformity and reliability
- Long life and high stability in partial state of charge (PSOC)
- IEC 60896

APPLICATIONS

- Off Grid Cabins & Homes
- Marine / RV
- Hybrid Solar & Grid Tie
- Wheel Chairs, Golf Carts
- Telecom Systems
- Off-Grid Industrial
- Micro Grid Systems

SOLD EXCLUSIVELY THROUGH PROFESSIONAL INSTALLATION PARTNERS.

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12V
Amp Hour Capacity C 20	250AH
Amp Hour Capacity C 48	256.67
Amp Hour Capacity C 72	263.33
Amp Hour Capacity C 100	270.00
Amp Hour Capacity C 120	277.25
Amp Hour Capacity C 240	284.50

TEMPERATURE SPECIFICATIONS

Cold temperature applications	
Discharge Temperature	(-40C)
Charge Temperature	(-40C)
Storage	-40C to 45C

CHARGE SPECIFICATIONS

Recommend Charge current	23A
Max Charge current	50A
Bulk Charge V	14.6
Absorption V	14.6
Float V	13.7
Equalization V \leq 50A	14.9

DISCHARGE SPECIFICATIONS

Current Discharge Rates	
20 hour rate	12.98A
10 hour rate	24.46A
5 hour rate	43.60A
1 hour rate	144.40A

MECHANICAL SPECIFICATIONS

Dimensions	20.5 x 10.6 x 8.8in
L x W x H	520 x 268 x 224 mm
Weight	170.9lbs (77.5KG)
Terminal Type	M8
Terminal Torque	90 in lbs (10NM)
Case Material	ABS
Case IP Rating	IP56
Cell Type - Chemistry	Lead Carbon AGM
Cell Type	Flat Plate

SAFETY TESTED

Safety Ratings	IEC60896
	CE

PERFORMANCE CHARACTERISTICS

