


HUBAGM

The HB series sealed lead-acid batteries, use high purity lead and advanced battery separators, in the manufacturing process. Our advantages include long cycle life and high reliability. The battery technology improves the deep cycling ability and greatly prolongs battery life with more than 600 cycles at 80% DOD.

The HB series are best suited for cycling and solar applications.

TECHNICAL DRAWING

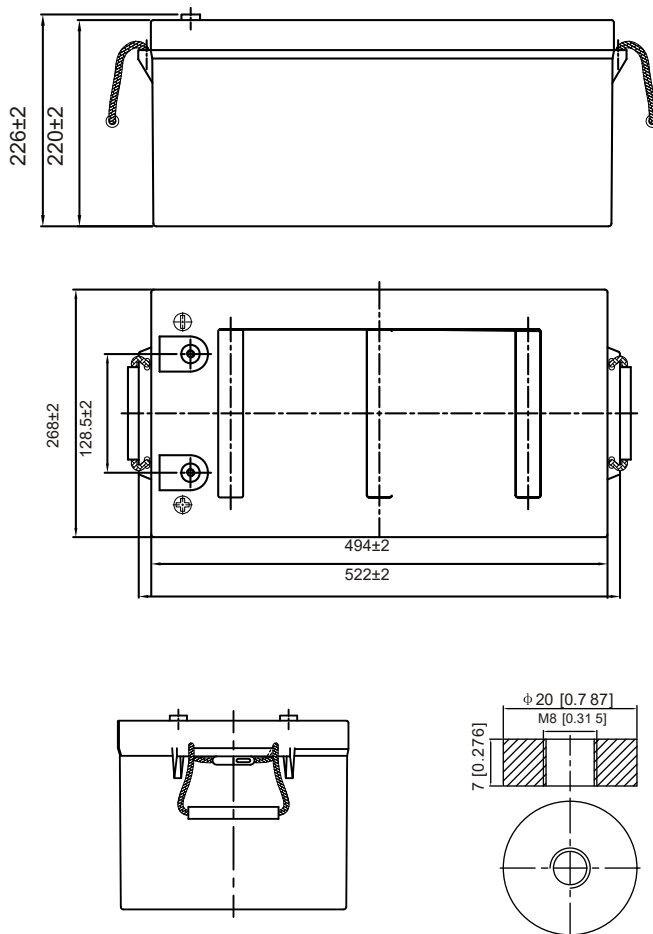

AGM

ABSORBED GLASS MAT
BATTERY

HB8D-260

BENEFITS AND ADVANTAGES

Start at the Core

- Able to operate at -40C to +60C
- DOD @ 50%, 1200 cycles
- Integrated design to ensure the best uniformity and reliability
- High purity lead, ensures long life and excellent performance
- IEC 60896

APPLICATIONS

- Off Grid Cabins & Homes
- Marine / RV
- Hybrid Solar & Grid Tie
- Wheel Chairs, Golf Carts
- Telecom Systems
- Off-Grid Industrial
- Micro Grid Systems

www.hubpower.ca

4238 Lozells Ave #114 Burnaby, BC V5A 0C4

Phone: (604) 420-7737

Email: sales@hubpower.ca

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12V
Amp Hour Capacity C 20	260AH
Amp Hour Capacity C 48	266.2AH
Amp Hour Capacity C 72	272.5AH
Amp Hour Capacity C 100	278.7AH
Amp Hour Capacity C 120	285.5AH
Amp Hour Capacity C 240	292.2AH

TEMPERATURE SPECIFICATIONS

Cold temperature applications	
Discharge Temperature	(-40C)
Charge Temperature	(-40C)
Storage	-40C to 45C

CHARGE SPECIFICATIONS

Recommend Charge current	26A
Max Charge current	52A
Bulk Charge V	14.7V
Absorption V	14.7V
Float V	13.6V
Equalization V $\leq 50A$	14.7V

DISCHARGE SPECIFICATIONS

Current Discharge Rates	
20 hour rate	13A
10 hour rate	26A
5 hour rate	44.2A
1 hour rate	143A

MECHANICAL SPECIFICATIONS

Dimensions L x W x H	20.47 x 10.55 x 8.15 in 520 x 268 x 207 mm
Weight	157.2lbs (71.3KG)
Terminal Type	M8
Terminal Torque	90 in lbs (10NM)
Case Material	ABS
Case IP Rating	IP56
Cell Type - Chemistry	AGM
Cell Type	Flat Plate

SAFETY TESTED

Safety Ratings	IEC60896 CE UL
----------------	----------------------

PERFORMANCE CHARACTERISTICS

